


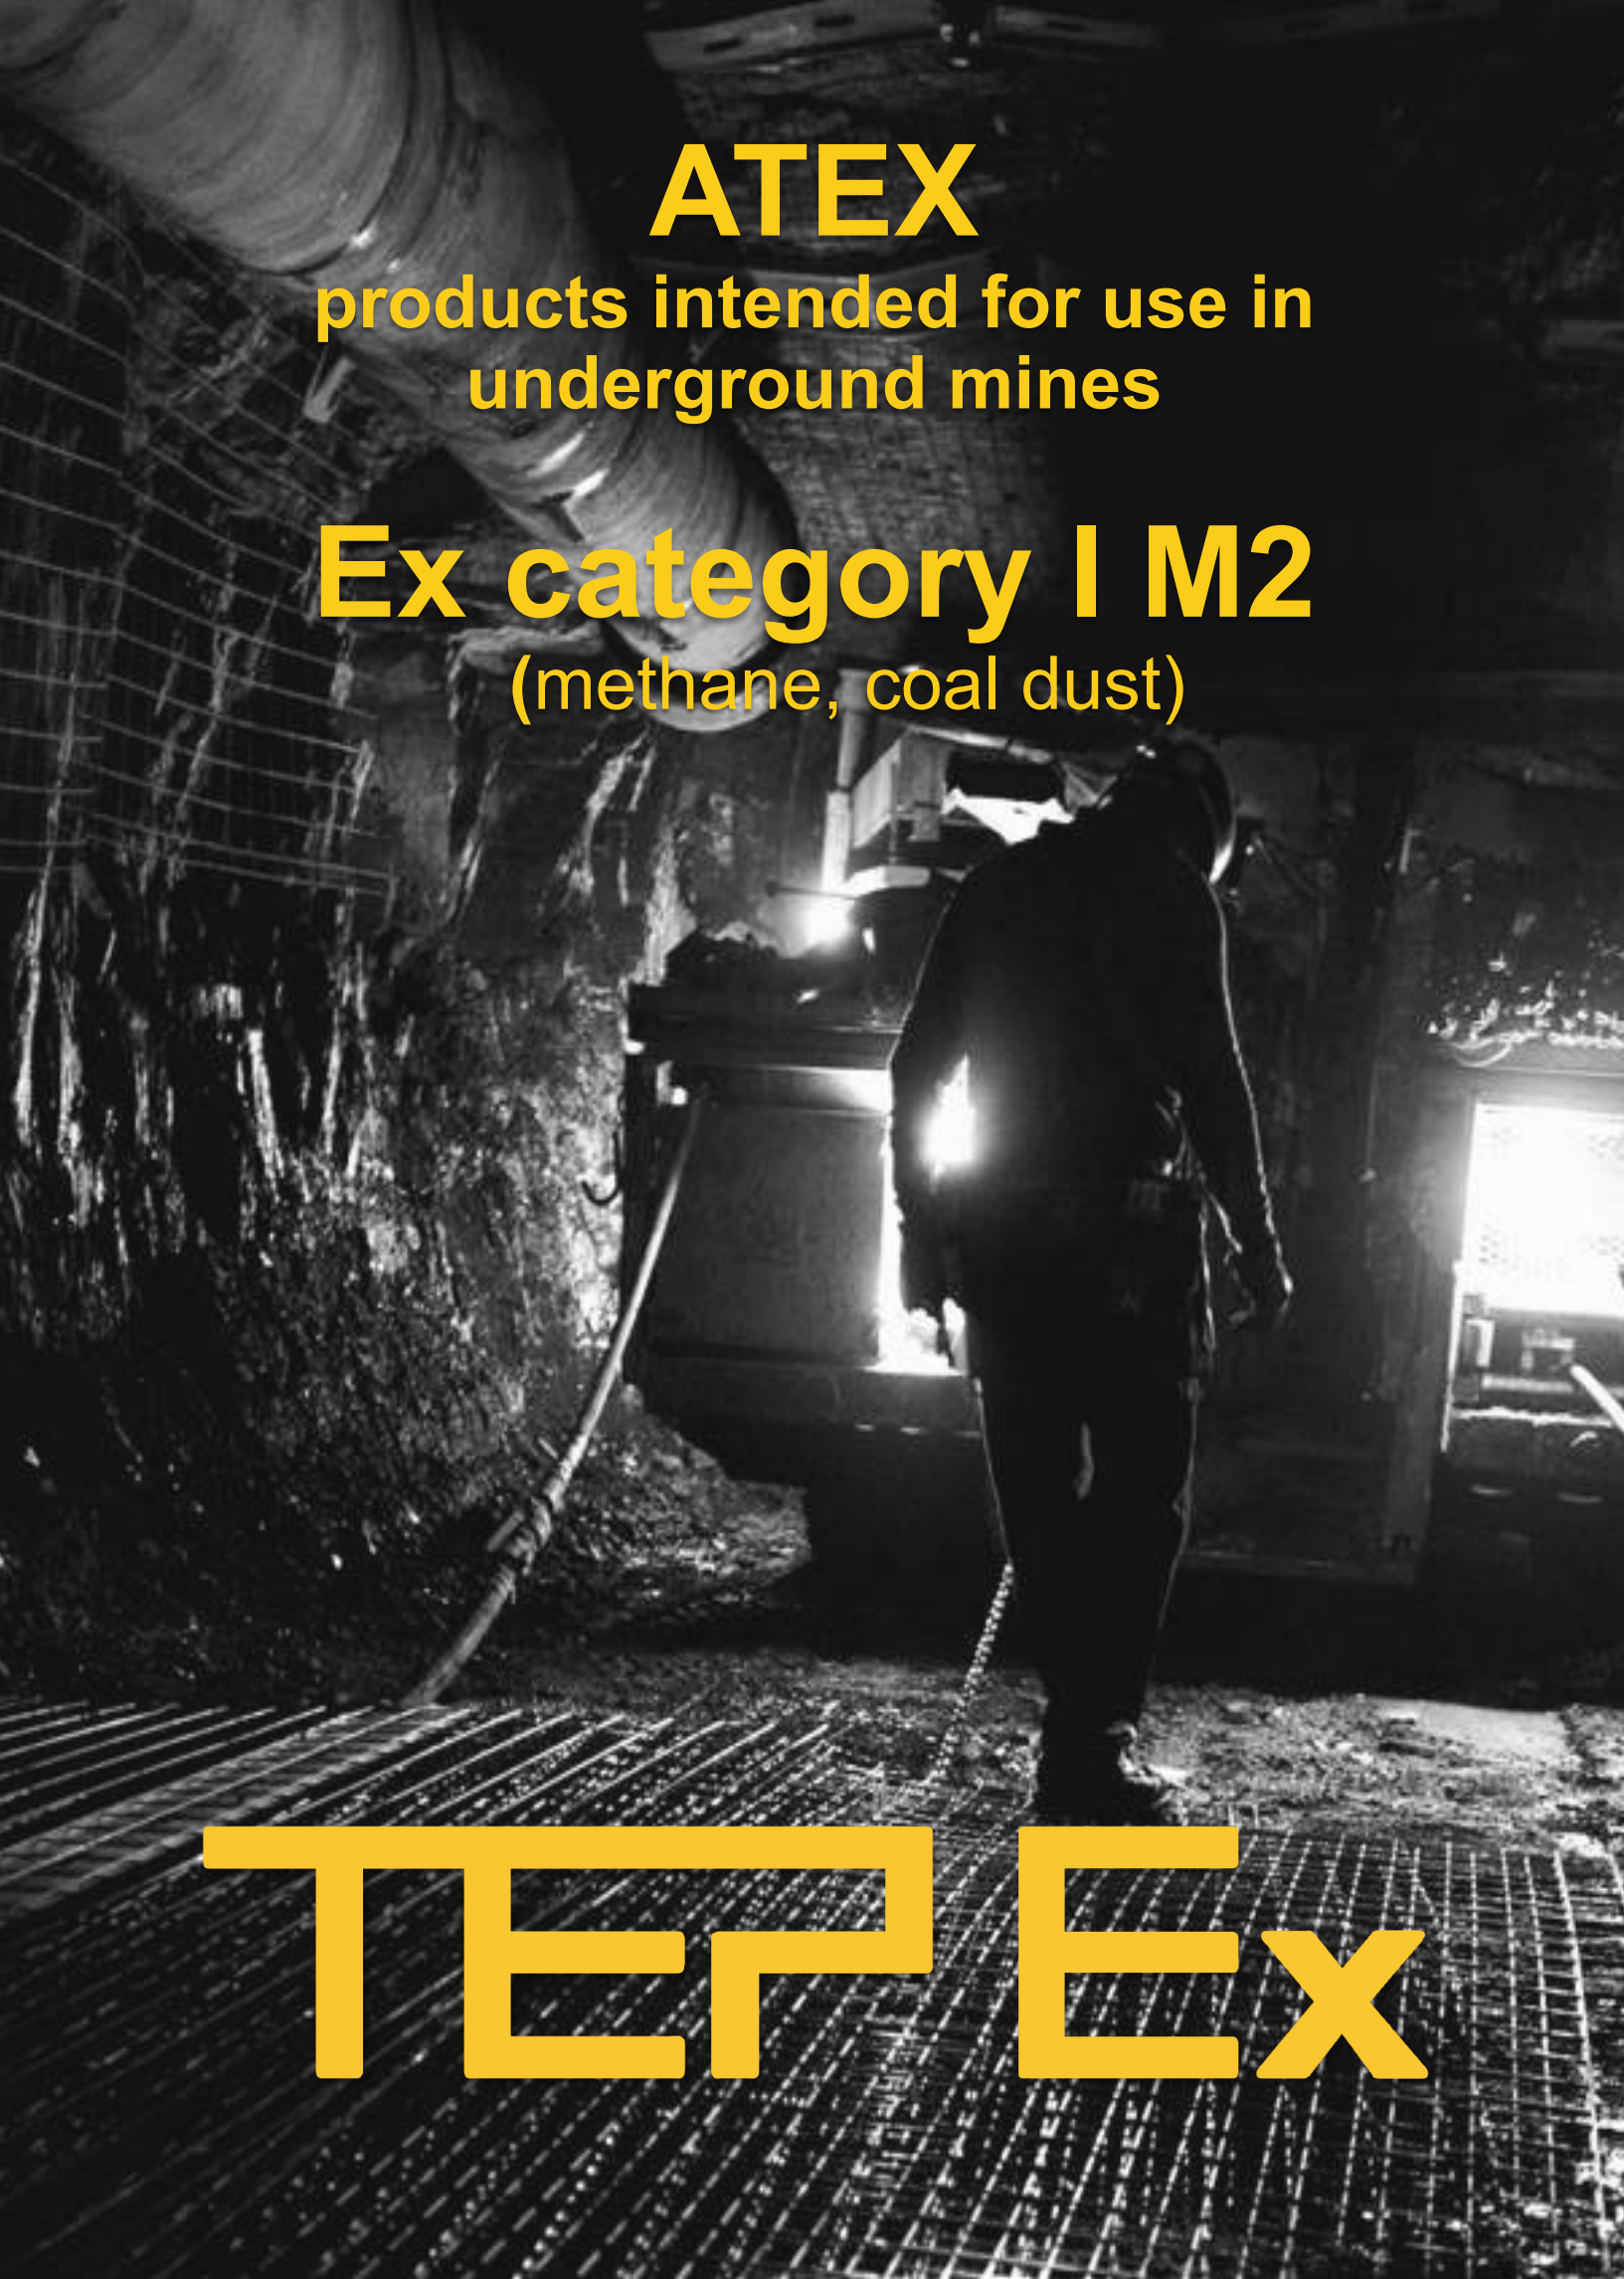

ATEX

products intended for use in
underground mines

Ex category I M2

(methane, coal dust)

TEPEX

Linear LED light fitting **PSF 28 LED-M**

Apparatus category: I M2
Explosion protection: Ex db eb mb I Mb
Environment temperature: $-20^{\circ}\text{C} \leq T_a \leq +55^{\circ}\text{C}$
Power: 28W, 37W



Control units **SKX 12 ... 15 / MSRU**

Apparatus category: I M2
Explosion protection: Ex db eb I Mb
Environment temperature: $-20^{\circ}\text{C} \leq T_a \leq +50^{\circ}\text{C}$
Degree of protection: IP66
Rated insulation voltage: 690 VAC



Distribution cabinets **R3002 - R3006**

Apparatus category: I M2
Explosion protection: Ex db eb I Mb
Environment temperature: $-20^{\circ}\text{C} \leq T_a \leq +50^{\circ}\text{C}$
Degree of protection: IP66
Rated current: Up to 500 A
Terminal cross-section: 240 mm²



High voltage junction box **R3003/R3003S**

Apparatus category: I M2
Explosion protection: Ex eb I Mb
Environment temperature: $-20^{\circ}\text{C} \leq T_a \leq +40^{\circ}\text{C}$
Max. voltage 6,3 kV
Max. current 420 A/185 sqmm



Ex distribution cabinets type R3002 - R3006



TEP Ex

Made in Croatia

R 3002 / R 3003 - SRU 1330.57


$U_n = 500 \text{ V AC}$ $I_n = 315 \text{ A}$ $2 \times 95 \text{ mm}^2$ IP66

CE 0722 Ex I M2 Ex db eb [ib] I Mb

FIDI 19 ATEX 0058X

P-7373

11-2021

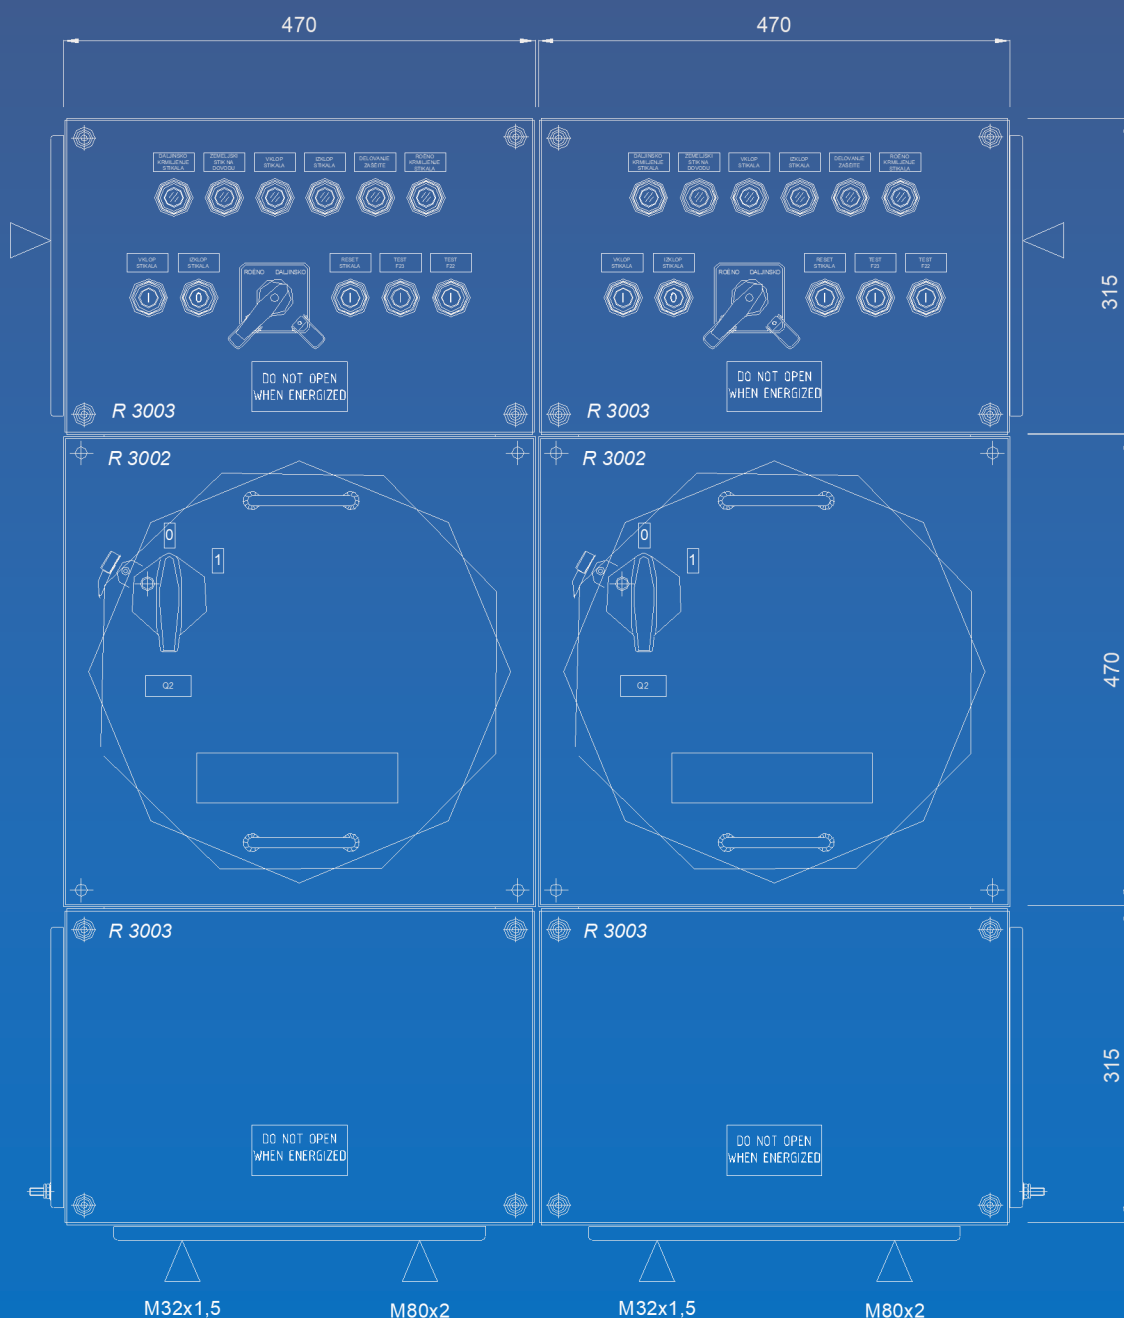

make your work surroundings safer



TEP Ex

Prilaz dr.F.Tuđmana 6, 49210 ZABOK, CROATIA

Tel: +385 49 222 900, +385 49 426 451

Fax: +385 49 426 450

@: tepex@tepex.hr prodaja@tepex.hr

Web: www.tepex.hr